


Sliding Door Privacy Turn Flash Turn Star

D37/32 x P 3/32" | D82 x P2.5mm

Install Instructions

Bankston
YSG

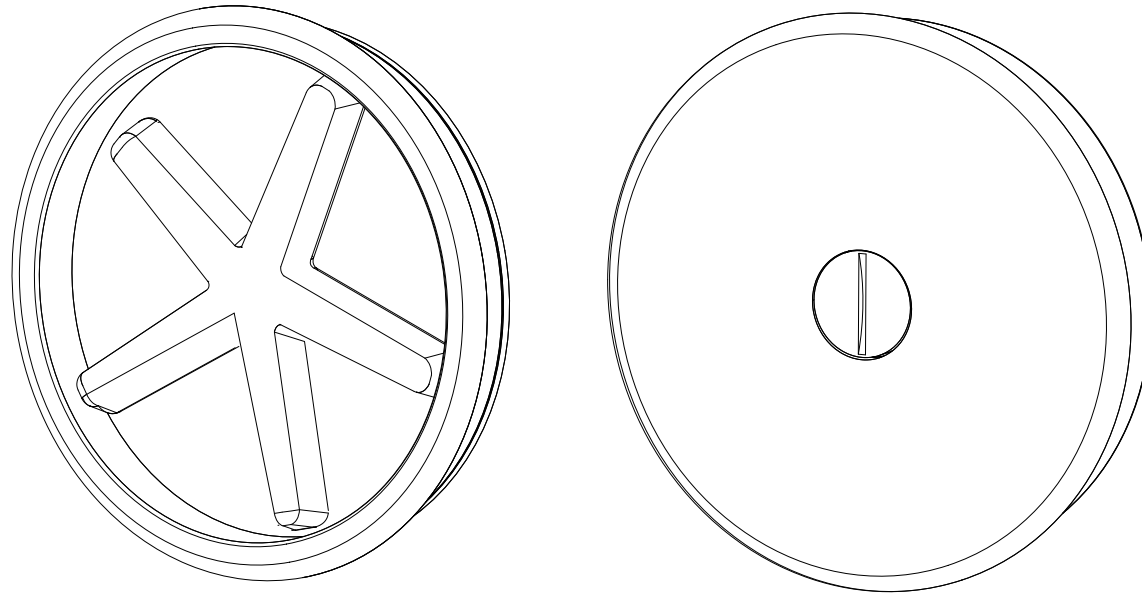

Finishes &
Materials



FAQs &
Warranty



Resources

bankston.com

@bankston_architectural



Bankston Australia
14-16 Stepney Street
Stepney, South Australia 5069

P. +61 (0)8 8362 1133
E. info@bankstonarchitectural.com.au

Bankston New Zealand
P. +64 (0)6 359 0008
E. info@bankstonarchitectural.co.nz

Bankston International
E. info@bankston.com

**SDG Trading Pty Ltd trading
as Bankston Architectural**

ACN 008 154 041
ABN 18 008 154 041

*Image used for illustration
purposes only




Please recycle
me after use




COMP467


1. Mark the door at your desired height.
2. Affix the provided template to the door and mark all points for drilling. Figure 1.

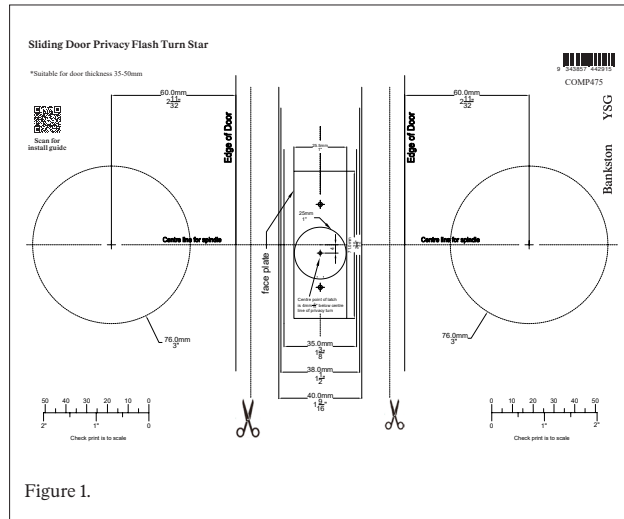


3. Drill a pilot hole to mark the centre of the 76mm or 3" bore hole.
4. Using a hole saw cut a 76mm or 3" hole halfway through the door from both sides. Figure 2.

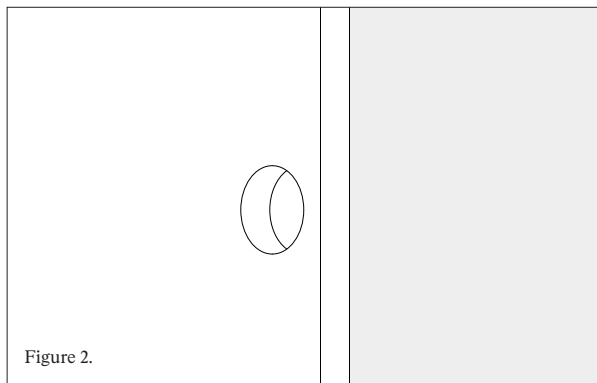


5. Gently sand back the edges of the hole to allow for the sliding door pull lip. Figure 3.

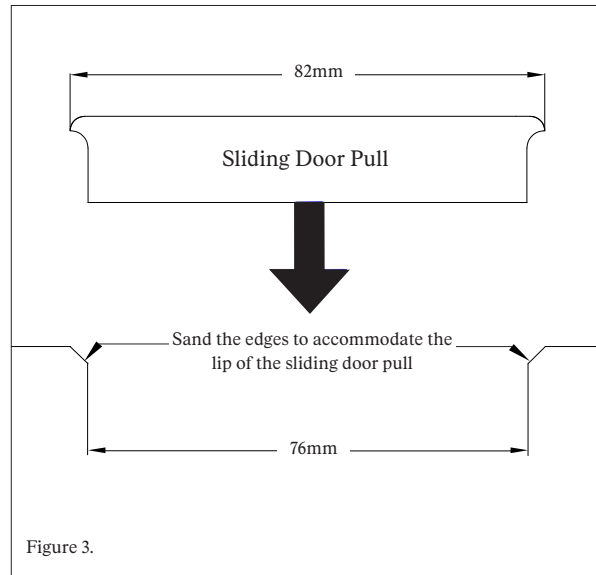


6. On the door edge use the template provided to mark the 25mm or 1" centre hole. Note: the sliding door privacy tube latch spindle follower is 4mm or $\frac{3}{16}$ " off centre to the privacy tube latch body.
7. Drill the centre sliding door privacy tube latch with a 25mm or 1" spade bit to a depth of 80mm or $3\frac{1}{8}$ ".
8. Insert the sliding door privacy tube latch (G) with face plate (I) and mark around the edges with a sharp knife. Figure 4.

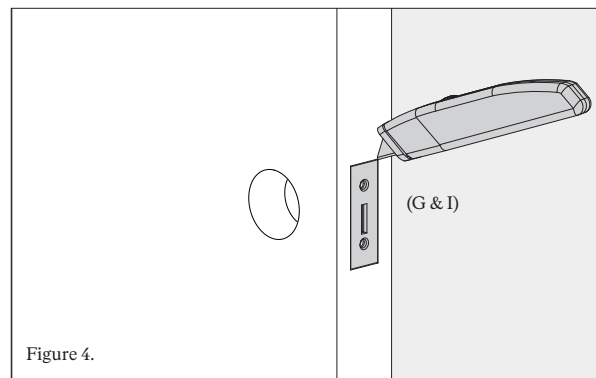


9. Using your preferred method create a recess of 4mm or $\frac{3}{16}$ " to accommodate the sliding door privacy tube latch (G) and face plate (I).
10. Insert the sliding door privacy tube latch (G) and face plate (I) into the door and pre-drill the two pilot holes at 6 o'clock and 12 o'clock.
11. Using the screws (L) provided fix the sliding door privacy tube latch (G) to the door. Figure 5.

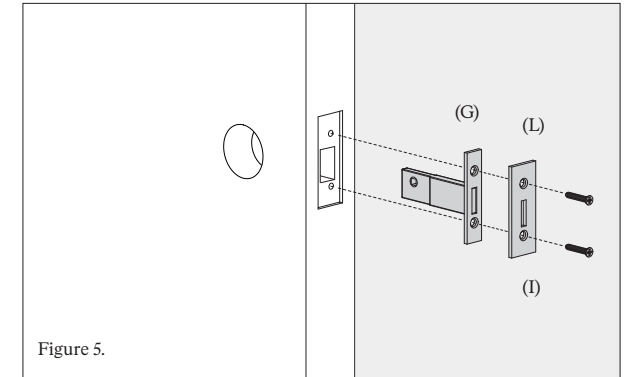


12. Install the spindle (D) through the sliding door privacy tube latch follower.
13. Place the emergency release inner plate (C) over the spindle (D) and into the door. Make sure the plate edge is flush with the outside of the door. Figure 6.

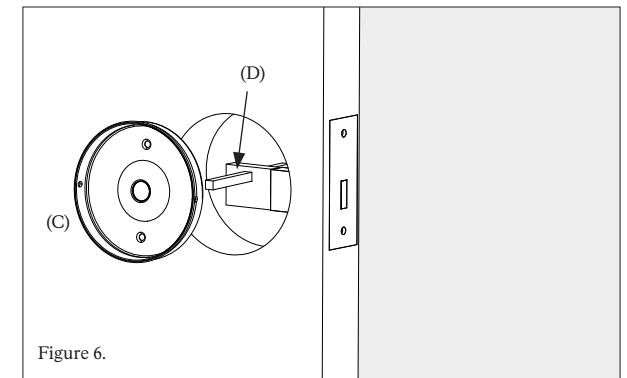


14. Screw the emergency release inner plate (C) to the door at 3 o'clock and 9 o'clock using wood screws (F) provided. Figure 7.

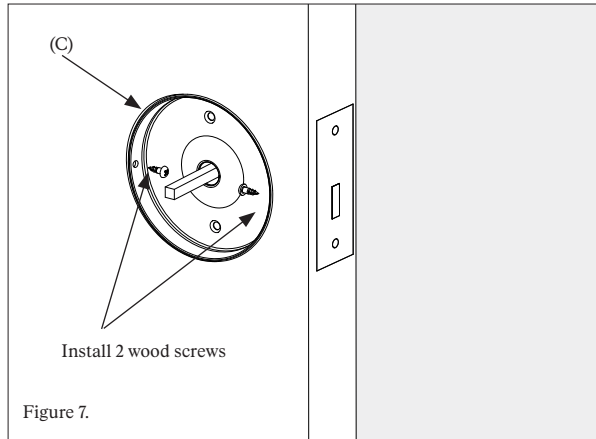

15. From the inside of the door place the privacy turn star (A) over the spindle (D) and into the door. Threaded rivets should be at 6 o'clock and 12 o'clock.
16. From the outside of the door use the bolts (E) that best suit your door thickness to attach privacy turn star (A) to the emergency release inner plate (C). Figure 8.

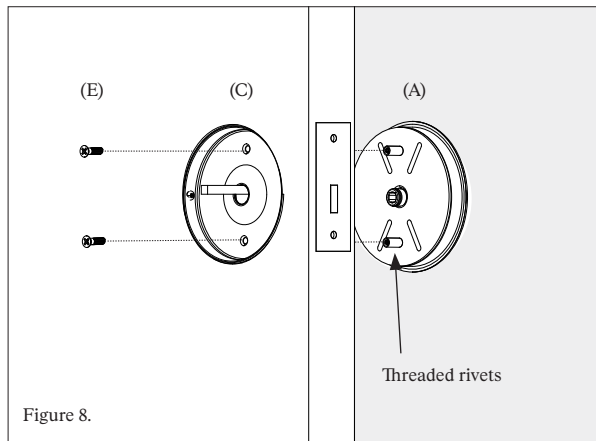


17. Place the magnetic emergency release (B) over the spindle (D) and onto the emergency release inner plate (C). Figure 9.

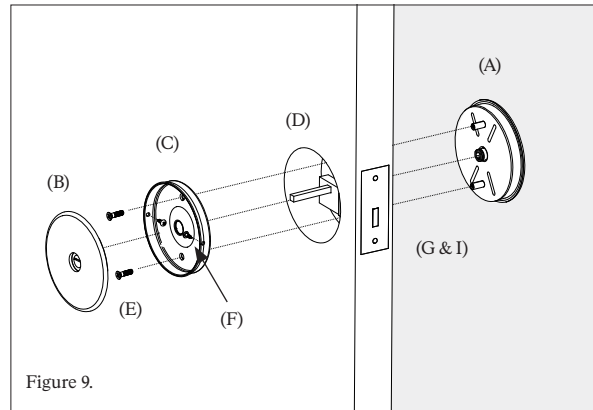


Installing the Edge Pull


18. To install the edge pull mark a horizontal line on the door edge at your desired height for the centre of the edge pull.
19. Mark a vertical line along the centre of your door edge. Figure 10.

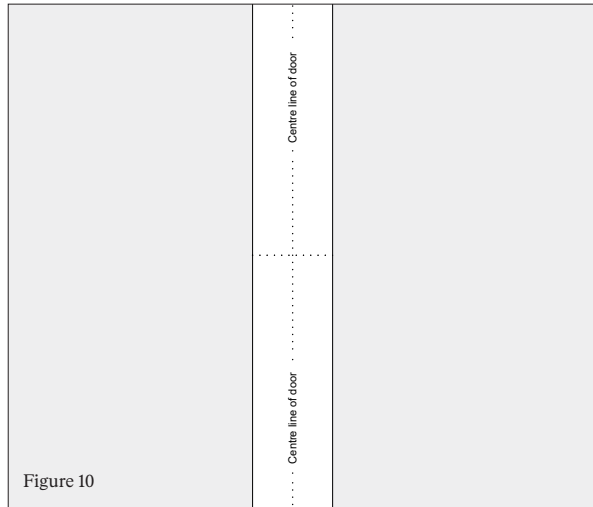

20. Using the provided template mark pilot holes and cavity to recess for the edge pull dust box (K) and edge pull face plate (J). Figure 11.

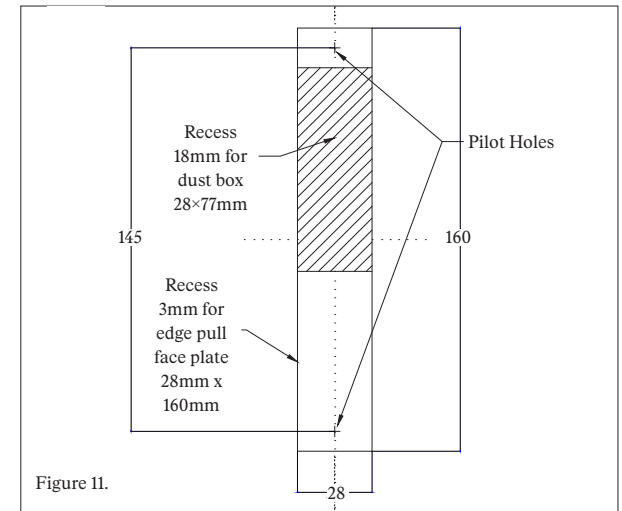

21. Drill the two pilot holes CTC 145mm or 5 11/16".
22. Using a sharp knife mark around the outside of the edge pull face plate (J).
23. Using a chisel gently remove the edge pull dust box (K) recess to 18mm or 11/16" and the edge pull face plate (J) recess to 3mm or 1/8".
24. Place the edge pull dust box (K) into the cavity.
25. Position the edge pull face plate (J) over the top with the triangular finger hole at the top.
26. The edge pull should now sit flush with the door edge, if not, repeat step 23.
27. Screw into the door using the wood screws (L). Figure 12.

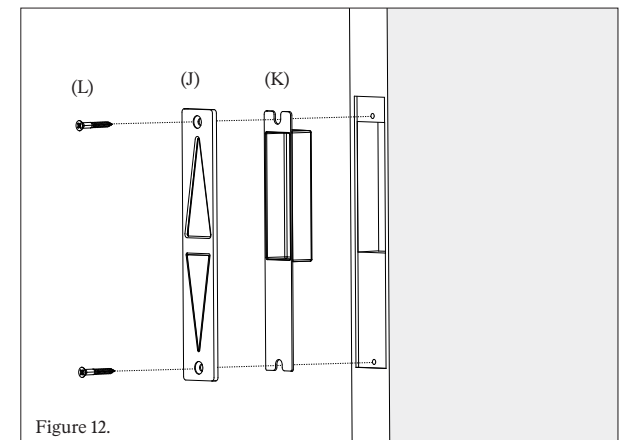

Install the Adjustable Keeper

28. Place template for the adjustable keeper (H) to the door frame to align with the sliding door privacy tube latch (G).



29. As per template, using your preferred method create a 20mm deep cavity and install the adjustable keeper (H).
30. Pre-drill two holes and install the adjustable keeper (H) with wood screws L25mm (L).
31. Test that the sliding door privacy tube latch (G) works and tighten adjustable keeper (H) screw to achieve a snug fit.

Included

- (A) Privacy turn star x 1
 (B) Emergency release x 1
 (C) Emergency release inner plate x 1
 (D) Spindle L75mm x 1
 (E) Bolts M3xL12, 18 and 30mm x 9
 (F) Wood screw L15mm x 3
 (G) Sliding door privacy tube latch x 1
 (H) Adjustable keeper x 1
 (I) Face plate x 1
 (J) Edge pull face plate x 1
 (K) Edge pull dust box x 1
 (L) Wood screws L25mm x 7

